

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS





IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**






CLUTCH OPERATING DEVICE OF VEHICLE.

Patent number: EP0433466
Publication date: 1991-06-26
Inventor: SATO KENICHI KABUSHIKI KAISHA (JP); IMAMURA TAKESHI KABUSHIKI KAIS (JP); NAKATA MASARU KABUSHIKI KAISHA (JP); SHINOHARA EISAKU KABUSHIKI KAI (JP)
Applicant: KABUSHIKI KAISHAKUBOTA (JP)
Classification:
- **International:** F02N11/10; F02N15/10; F16D25/08; F16D25/12
- **European:** F16D25/08B4
Application number: EP19900910187 19900704
Priority number(s): WO1990JP00862 19900704; JP19890122650U 19891018; JP19890172802 19890704

Also published as:


 WO9100440 (A)
 US5207306 (A1)
 EP0433466 (A4)
 EP0433466 (B1)

Cited documents:

 US2501005
 WO9002274
 GB2174169
 FR2142363
 US4856380
more >>

Abstract not available for EP0433466

Data supplied from the **esp@cenet** database - Worldwide



Europäisches Patentamt
European Patent Office
Office européen des brevets



⑪ Publication number:

0 433 466 A1

⑫

EUROPEAN PATENT APPLICATION
published in accordance with Art.
158(3) EPC

⑲ Application number: 90910187.5

⑤① Int. Cl.⁵: F16D 25/08, F16D 25/12,
F02N 11/10, F02N 15/10

⑳ Date of filing: 04.07.90

⑤⑤ International application number:
PCT/JP90/00862

⑤⑦ International publication number:
WO 91/00440 (10.01.91 91/02)

③① Priority: 04.07.89 JP 172802/89
18.10.89 JP 122650/89 U

④③ Date of publication of application:
26.06.91 Bulletin 91/26

⑥④ Designated Contracting States:
ES GB

⑦① Applicant: KABUSHIKI KAISHA KUBOTA
No. 2-47, Shikitsu-higashi 1-chome
Naniwa-ku
Osaka-shi Osaka 556(JP)

⑦② Inventor: SATO, Kenichi Kabushiki Kaisha
Kubota Sakai
Seizosho nai 64, Ishizukita-machi
Sakai-shi Osaka 590(JP)

Inventor: SHINOHARA, Eisaku Kabushiki
Kaisha Kubota Sakai
Seizosho nai 64, Ishizukita-machi
Sakai-shi Osaka 590(JP)
Inventor: IMAMURA, Takeshi Kabushiki Kaisha
Kubota Sakai
Seizosho nai 64, Ishizukita-machi
Sakai-shi Osaka 590(JP)
Inventor: NAKATA, Masaru Kabushiki Kaisha
Kubota Sakai
Seizosho nai
64, Ishizukita-machi Sakai-shi Osaka 590(JP)

⑦④ Representative: TER MEER - MÜLLER -
STEINMEISTER & PARTNER
Mauerkircherstrasse 45
W-8000 München 80(DE)

⑤④ CLUTCH OPERATING DEVICE OF VEHICLE.

⑤⑦ A clutch operating device for pushing the clutch release member (5) of a dry-disc type clutch (1) disposed between a fly wheel (2) fixed to the output shaft of the engine and a propelling shaft (3) rotatably supported by the support wall (10) of the transmission case, said device being provided with an annular cylinder room (A) formed on said support wall (10) coaxially with said propelling shaft (3); an annular piston (17) inserted into said cylinder room (A) slidably in the axial direction; a release bearing (16) provided on the tip of said piston (17) and detachably abutting on said clutch release member (5); and a means (23) for feeding pressure oil to said cylinder room (A) when a clutch pedal (20) is stepped on in order to push said piston (17) toward the clutch release member (5).

EP 0 433 466 A1

DEVICE FOR OPERATING CLUTCH OF VEHICLE

TECHNICAL FIELD

The present invention relates to a device for operating the clutch of a vehicle such as a tractor.

5 BACKGROUND ART

For example, the main clutch of a farm tractor is provided between a flywheel mounted on the crankshaft of an engine and a propeller shaft rotatably supported by the wall of a clutch housing. A release hub mounted on the propeller shaft is axially shifted by depressing a clutch pedal to thereby cause a
10 release bearing on the hub to push clutch disengaging members, whereby the clutch is disengaged (see, for example, Unexamined Japanese Utility Model Publication SHO 57-9625).

With the clutch operating device described, the depression of the clutch pedal is transmitted through an arm, and a link or wire to a clutch release fork, which in turn pushes the release hub.

The conventional clutch operating device necessitates many parts, such as arm, link or wire, clutch
15 release fork and pivot, is complex in construction, is not fully resistant to great loads and requires a great force to depress the pedal.

Accordingly, the specification of U.S. Patent No. 3,687,253, for example, discloses a device adapted to operate a clutch with a small fluid pressure instead of the above mechanical means.

This conventional clutch operating device of the fluid pressure type has a stationary sleeve fitted around
20 a propeller shaft concentrically therewith and projecting from the support wall of a transmission case toward the clutch. The stationary sleeve has a peripheral shoulder, a reduced diameter end portion closer to the clutch, and a large diameter base portion adjacent to the support wall. A movable sleeve is slidably fitted around the reduced diameter portion of the stationary sleeve. The movable sleeve carries a release bearing, which is engageable with clutch disengaging members. A collar is axially slidably fitted around the large
25 diameter portion of the stationary sleeve and around one end portion of the movable sleeve. The collar is axially shiftable by the pivotal movement of a yoke, which is coupled to a clutch pedal. The shoulder of the stationary sleeve, the end face of the movable sleeve and the inner surface of the collar define a fluid chamber, to which a fluid is supplied by a pump. The fluid supplied to the fluid chamber flows through a clearance between the end portion of the movable sleeve and the inner surface of the collar and is forced
30 out from passages communicating with the outside and sprayed on the clutch disk to cool the clutch.

To disengage the clutch with use of the conventional operating device of the fluid pressure type, the yoke is pivotally moved by depressing the clutch pedal, whereby the collar is shifted toward the movable
sleeve. The shift of the collar diminishes the clearance of the fluid chamber formed between the movable
35 sleeve and the collar inner surface to increase the fluid pressure within the fluid chamber and push the movable sleeve with the pressure. The movable sleeve in turn pushes the clutch disengaging members to disengage the clutch.

However, the conventional device is not usable for disk clutches of the dry type since it is adapted to force out the fluid from the fluid passages and cool the disk at all times.

Further although the conventional clutch operating device of the fluid pressure type is adapted to
40 engage and disengage the clutch by depressing the clutch pedal, the operator is unable to detect deliberate slipping of the clutch from the resistance to the depressing action.

With the aforementioned mechanical clutch operating device, the pressure of the clutch disk can be sensed as resistance to depression, so that the clutch in the state of deliberate slipping can be detected by the foot for delicate manipulation. However, with the conventional fluid pressure-type device wherein the
45 collar is shifted to merely control the clearance, the operator is unable to sense the clutch slipping with his foot and therefore experiences difficulty in manipulating the clutch delicately.

Further with the fluid pressure device wherein the yoke is manipulated as in the mechanical device, the clutch pedal must be coupled to the yoke with a wire, rod or the like. It is therefore impossible to simplify the construction.

50

DISCLOSURE OF THE INVENTION

An object of the present invention is to provide a clutch operating device which is simple in construction, can be manipulated with a small depressing force and permits the operator to sense the state of the clutch being operated with his foot so that the clutch can be operated delicately in the state of

deliberate slipping.

To fulfill the above object, the present invention provides a clutch operating device for use in vehicles for pushing the clutch disengaging members of a dry disk clutch which is disposed between a flywheel mounted on the output shaft of an engine and a propeller shaft rotatably supported by a support wall of a transmission case, the device being characterized in that the device comprises:
 5 an annular cylinder chamber provided on the support wall concentrically with the propeller shaft,
 an annular piston axially slidably fitted in the cylinder chamber,
 a release bearing mounted on the forward end of the piston and engageable with the clutch disengaging members by contact therewith, and
 10 means for supplying a pressure oil to the cylinder chamber by depressing a clutch pedal to push out the piston toward the clutch disengaging members.

According to the present invention, the pressure oil is supplied from the oil supplying means to the cylinder chamber via a suitable oil channel. Since the annular piston of a release hub is fitted in the cylinder chamber, the piston is pushed over the entire circumference thereof in the axial direction with the pressure
 15 oil, whereby the release bearing is brought into contact with the clutch disengaging members to push the members and disengage the clutch.

At this time, the resistant force of the clutch disk acting on the clutch disengaging members against the pushing action is transmitted to the working oil in the cylinder chamber, and this reaction is sensed by the foot depressing the clutch pedal. Thus, the operator can recognize deliberate slipping of the clutch for
 20 delicate manipulation.

Further according to the invention, the pedal-operated oil supplying means can be connected to the cylinder chamber by a pipe or piping. This eliminates the need for the conventional link mechanism for moving the yoke, hence a simplified construction.

According to the present invention, the cylinder chamber can be in the form of an annular space formed
 25 between a tubular portion surrounding the propeller shaft and projecting from the support wall toward the clutch and a hollow cylinder provided around the tubular portion. The cylinder can be in screw-thread engagement with the tubular portion.

The cylinder chamber can be in the form of an annular space formed in the support wall.

A bearing can be interposed between the inner surface of the tubular portion and the propeller shaft.

30 An elastic member can be provided for biasing the piston toward the clutch disengaging members.

Retaining means can be provided for preventing the piston from rotating relative to the tubular portion.

Restricting means can be provided for restricting the amount of movement of the piston toward the
 clutch.

The restricting means can be provided by a retaining ring on the propeller shaft.

35 The restricting means can be provided by bolts disposed between the piston and the hollow cylinder.

The hollow cylinder can be formed with an oil pressure relief port which communicates with the cylinder chamber immediately before the piston reaches a projection limit.

The oil pressure supplying means can be provided with a pressure sensor for detecting an abnormal oil pressure when the clutch pedal is depressed, and malfunction handling means operable upon the pressure
 40 sensor detecting the abnormal oil pressure.

The oil pressure supplying means can be provided with an oil tank, a low level sensor for detecting a lowered oil level in the oil tank, and engine stopping means for rendering the engine inoperative upon the sensor detecting the lowered oil level.

Alarm means can also be provided which operates upon the sensor detecting the lowered oil level.

45 Means can be provided for detecting the home position of the piston.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a sectional view showing an embodiment of the invention;

FIG. 2 is a sectional view showing a modified hydraulic cylinder;

50 FIG. 3 is a sectional view showing another embodiment of the invention;

FIG. 4 is a side elevation partly in section of an oil tank;

FIG. 5 to FIG. 8 are circuit diagrams;

FIG. 9 is a sectional view showing another embodiment of the invention;

FIG. 10 is a view in section taken along the line X-X in FIG. 9;

55 FIG. 11 is a diagram showing a piping system for a tank and brake and clutch master cylinders;

FIG. 12 is a view in section taken along the line XII-XII in FIG. 9;

FIG. 13 is a sectional view showing a modification;

FIG. 14 is a fragmentary side elevation in section showing another embodiment;

FIG. 15 is a view in section taken along the line XV-XV in FIG. 14;
 FIG. 16 is a sectional view showing another embodiment of the invention;
 FIG. 17 is a fragmentary view in section showing projection restricting means;
 FIG. 18 is a sectional view showing another projection restricting means;
 5 FIG. 19 is a sectional view showing another embodiment of the invention;
 FIG. 20 is a fragmentary side elevation in section;
 FIG. 21 is a front view of a hydraulic cylinder portion;
 FIG. 22 is a sectional view showing another embodiment of the invention;
 FIG. 23 is a view in section taken along the line XXIII-XXIII in FIG. 22;
 10 FIG. 24 is an electric circuit diagram; and
 FIG. 25 is a side elevation in section showing another embodiment.

BEST MODE OF CARRYING OUT THE INVENTION

Embodiments of the present invention will be described below with reference to the drawings.

15 Referring to FIG. 1, indicated at 1 is a dry single-plate clutch for use as the main clutch of the running system of a farm tractor. The clutch is provided between a flywheel 2 fixed to the crankshaft of an engine and a propeller shaft 3 for effecting or interrupting the transmission of power from the flywheel 2 to the propeller shaft 3.

20 Secured to the flywheel 2 is a clutch cover 4 which has a pressure plate 6 connected thereto by clutch disengaging members 5, i.e., disengaging levers. Pressure springs 7 are provided between the clutch cover 4 and the pressure plate 6. A clutch disk 8 interposed between the flywheel 2 and the pressure plate 6 is mounted on the propeller shaft 3 and slidable relative thereto axially.

25 Indicated at 9 is a clutch housing connected to a flywheel housing and having inside thereof a support wall 10, which is bolted to the housing (or formed integrally therewith). The support wall has a tubular portion 11 projecting forward and rotatably supporting the propeller shaft 3 by a bearing 12.

The propeller shaft 3 is a tubular shaft having inserted therethrough a PTO propeller shaft 13 connected directly to the crankshaft. Fitted to the propeller shaft 3 in the rear of the support wall 10 are a hydraulic clutch 14, gear, etc. for changing the speed of the running system. A release hub 15 is axially movably provided around the shaft 3 between the support wall 10 and the clutch 1.

30 The release hub 15 comprises large and small two tubular portions. The small tubular portion has a release bearing 16 mounted thereon and adapted to come into contact with the clutch disengaging members 5. The large tubular portion serves as an annular piston 17.

35 Provided on the support wall 10 around the tubular portion 11 concentrically therewith is a hollow cylinder 18 having one end fixed to the support wall 10 with bolts. The tubular portion 11 and the hollow cylinder 18 provide a hydraulic cylinder 19 having a cylinder chamber A which is open toward the clutch 1. The annular piston 17 is fitted in the chamber.

40 The annular piston 17, cylinder chamber A, release bearing 16, etc. are concentric with the propeller shaft 3. A pressure oil, when supplied to the cylinder chamber A, produces a pressure on the release bearing 16 uniformly over the entire circumference thereof, causing the bearing to push the disengaging members 5 to disengage the clutch 1.

The tractor has a clutch pedal 20, which, when depressed, actuates a master cylinder 21 on the tractor body to supply the pressure oil to the cylinder chamber A through a hose (or pipe) 22. These parts provide pressure oil supply means 23.

45 With the clutch operating device shown in FIG. 1, the pressure oil is supplied from the master cylinder 21 of the supply means 23 to the cylinder chamber A via the hose 22 when the clutch pedal 20 is depressed. The annular piston portion 17 of the release hub 15 is fitted in the cylinder chamber A, so that the pressure oil axially pushes the release hub 15 over the entire circumference thereof, bringing the release bearing 16 into contact with the clutch disengaging members 5 to cause the bearing to push these members and disengage the clutch 1.

50 FIG. 2 shows a modification of the hydraulic cylinder 19. The support wall 10 and the cylinder 18 of the foregoing embodiment are integral, and the two concentric tubes or cylinders define a cylinder chamber A. This support wall 10 is difficult to make integrally with the clutch housing and needs to be made as a separate wall.

55 FIG. 3 shows another embodiment of the invention. The tubular portion 11 and the hollow cylinder 18 are made as separate members and are removably in screw-thread engagement with each other by threads 24. The cylinder 18 is fixed to the clutch housing 9 with bolts 25.

The master cylinder 21 of the pressure oil supply means 23 is provided with an oil tank 26.

When the clutch pedal 20 is depressed, oil is supplied from the oil tank 26 to the cylinder chamber A,

and the oil pressure axially pushes out the annular piston 17. The movement of the piston 17 pushes the release levers 5 with the release hub 15 to disengage the clutch 1 to interrupt power transmission.

As seen in FIG. 4, the oil tank 26 is provided with a low level sensor 27 for detecting a lowered oil level within the oil tank 27. When the oil within the tank 26 descends to the definite level or lower, the sensor is
5 turned on.

FIG. 5 shows a starter 29 for starting the engine, and a key switch 30. The starter 29, key switch 30 and low level sensor 27 are connected in series with a battery or like power supply 31. Thus, an engine stopping means 32 for rendering the engine unable to start (inoperative) upon the sensor 27 detecting the lowered level is provided by incorporating the low level sensor 27 into the series circuit of starter 29 and
10 key switch 27 in series therewith.

FIG. 6 shows another embodiment, wherein an engine stopping solenoid 34 is connected in series with the low level sensor 27 to thereby provide engine stopping means 32. The engine stopping solenoid 34 is so designed as to close the valve of the fuel injection pump for supplying fuel to the engine when energized. Accordingly, the solenoid 34 is actuated upon the sensor 27 detecting the lowered level to stop
15 the engine in operation.

FIG. 7 shows another embodiment, wherein an alarm lamp, alarm buzzer or like alarm means 36 is connected in series with the low level sensor 27, such that the alarm means 36 is actuated upon the sensor 27 detecting the lowered level.

FIG. 8 shows another embodiment, wherein the alarm means 36 is connected in parallel with the series
20 circuit of starter 29 and key switch 30 shown in FIG. 5.

The foregoing embodiments including the low level sensor are so adapted as to cause the engine stopping means 32 to render the engine inoperative upon the oil within the tank 26 lowering to the definite level. This eliminates the likelihood that the vehicle will travel with difficulty encountered in the operation of the clutch 1 due to a reduction in the amount of oil in the tank 26, ensures improved safety and enables the
25 operator to repair the oil tank 26 or the like or supply the oil promptly.

Further upon the reduction in the amount of oil in the tank 26, the alarm means 36 gives an alarm to notify the operator of the reduction immediately, so that the oil tank 26 or the like can be repaired or replenished with oil before the clutch 1 becomes difficult to operate, hence improved safety.

FIGS. 9 to 15 show another embodiment of the invention. In this embodiment, the hollow cylinder 18 is
30 formed with a pair of cutout grooves (engaged portions) 38 extending from its front end axially thereof and positioned symmetrically diametrically thereof.

The piston 17 is provided at its front end with a pair of projections (engaging portions) 39 projecting outward radially thereof and fitting in the cutout grooves 38 of the hollow cylinder 18, whereby the release hub 15 is held against rotation. Thus, the cutout grooves 38 and the projections 39 provide retaining means
35 40 (see FIG. 10). The projections 39 are free to move through the grooves 38 longitudinally thereof and will not prevent the axial movement of the release hub 15.

A coiled compression spring 41 is provided between the release hub 15 and the tubular portion 11 for biasing the release hub 15 toward the clutch disengaging members 5. The coiled spring 41 is sufficiently smaller than the pressure springs 7 in biasing force and will not decrease the pressure applied to the clutch
40 disk of the clutch 1. The front portion of the release hub 15 has air vents 42 for preventing the thermal deformation of the coiled spring 41.

With reference to FIG. 11, a tank 45 for master cylinders 43, 44 for hydraulic brakes is adapted to supply working oil to the master cylinder 21 for the clutch and thus made to serve also for the clutch. The pipe 22 extends into the clutch housing 9 through a hole 46 in a side portion of the housing and is inserted
45 through and supported by a rubber tube 47 fitted in the hole 46. As seen also in FIG. 12, the rubber tube 47 has an insertion passage 48 for the pipe 22 to extend therethrough, and a slit 49 radially extending outward from the passage 48 for inserting the pipe 22 into the passage 48. The slit 49 serves as an air channel for lowering the internal temperature of the clutch housing 9.

As seen in FIG. 13, the coiled spring 41 may be fitted around the hollow cylinder 18, with one end of
50 the spring 41 bearing against the projections 39 of the release hub 15 and the other end thereof against a portion of the cylinder 18.

FIGS. 14 and 15 show another embodiment, wherein the means 40 for preventing the rotation of the release hub 15 comprises axial grooves (engaged portions) 51 formed in the inner surface of the tubular portion 11 at its front end, and roll pins (engaging portions) 52 fitting in the respective grooves 51 and
55 implanted in holes 50 formed in the release hub 15.

The projection 39 and the cutout groove 38, or the roll pin 52 and the groove 51 may be positioned in reverse relation with each other.

The retaining means 40 of the above embodiment prevents the rotation of the piston 17 and therefore

precludes damage to the seals 53, 54 of the piston.

FIGS. 16 to 18 show another embodiment of the invention. Indicated at 55 is a pedal sensor operable by the depression of the clutch pedal 20, and at 56 is a pressure gauge or like pressure sensor provided for the pipe 22. The two sensors 55, 56 are connected to a control box 57.

5 Although not shown, the pedal sensor 55 is coupled to the starter switch to render the engine inoperative unless the sensor is on. The pedal sensor 55, when actuated, permits the pressure sensor 56 or the control box 57 to function.

The pressure sensor 56 detects the pressure of oil in the oil supply means 23, and the pressure is compared by a comparator within the control box 57 with a predetermined pressure at which the clutch 1 is normally disengaged by the depression of the clutch pedal 20, such that if the pressure detected is lower, 10 the control box 57 detects a pressure abnormality to recognize oil leakage.

An alarm 58, connected to the control box 57, is an alarm buzzer, alarm lamp, or switch or lever actuator for stopping the engine and constitutes a malfunction handling means 59 along with the control box 57.

15 The pressure sensor 56 may be provided on any of the members including the master cylinder 21 through the hydraulic cylinder 19. The alarm 58 may be so adapted as to function if the sensor 55 fails to detect the predetermined pressure when turned on.

The hydraulic cylinder 19 is further provided with a clutch wear limit detector 60. The hollow cylinder 20 has a valve casing 61, the interior of which is in communication with the cylinder chamber A via a channel 62. A valve disk 63 is provided inside the valve casing 61.

The valve disk 63 is held in contact with a valve seat 65 by a spring 64 so that no oil pressure will be applied to a pressure sensor 66 provided outside the casing 61. The valve disk 63 can be pushed by a pushing member 68 provided on a bored projection 67 of the annular piston 17.

25 When the clutch disk 8 of the clutch 1 wears almost to a limit, the position to which the piston 17 is returned when the clutch is engaged gradually shifts rightward in FIG. 16, with the result that the pushing member 68 pushes the valve disk 63 against the spring 64 to open the valve, permitting the internal oil pressure of the valve casing 61 to act on the pressure sensor 66.

The pressure sensor 66 is connected to an alarm 69 to actuate an alarm buzzer, alarm lamp or the like upon detecting the oil pressure. The pressure sensor 66 may be connected to the control box 57.

30 The propeller shaft 3 is provided with projection restricting means B comprising a retaining ring 70 or split collar. The retaining ring 70 is adapted to come into contact with the small tubular portion 15a of the release hub 15, providing a limit to the projection of the piston 17 in the pushing-out direction. When the small tubular portion 15a is in contact with the retaining ring 70, the piston 17 has not slipped off from the cylinder chamber A, nor are the clutch disengaging members 5 subjected to an excessive pressure, and the piston is prevented from projecting further, with the members 5 held out of contact with the clutch disk 8.

35 FIG. 17 shows projection restricting means B which is in the form of a protrusion 6a formed on the pressure plate 6. When pushed by the piston 17 projected, the clutch disengaging members 5 come in contact with the protrusion 6a, restricting further projection of the piston 17.

40 With reference to FIG. 18 showing another means, the outer periphery of the piston 17 and the outer periphery of the hollow cylinder 18 are provided with projections 71, 72, respectively. These projections 71 or 72 are formed at one end of the piston or cylinder closer to the clutch 1 and equidistantly spaced along the circumference. Rods 73 are screwed in the respective projections 71 of the piston 17, extend through the respective projections 72 of the hollow cylinder 18 and each carry a nut 74 screwed on the free end.

45 The rods 73 extending through the projections 72 permit the piston 17 to move axially but prevent the piston 17 from rotating relative to the hollow cylinder 18. The nuts 74 restrict the amount of projection of the piston 17 by coming into contact with the projection 72. Thus, the nuts 74 constitute projection restricting means B. The limit position of projection of the piston 17 is adjustable by varying the position of the nuts 74.

50 With the embodiment described above, the oil supply means 23 is provided with the pressure sensor 56 for detecting an abnormal oil pressure when the clutch is disengaged, and the malfunction handling means 59 operable upon the pressure sensor 56 detecting an abnormal oil pressure when the pedal sensor 55 operates. Accordingly, when an abnormality occurs in the oil pressure, for example, due to an oil leak from the oil supply means 23 or cylinder chamber A, the pressure sensor 56 detects the abnormality to actuate the malfunction handling means 59. Thus, oil leakage or like fault can be detected immediately to 55 give an alarm.

Further the piston 17 having the release bearing 16 for engaging and disengaging the clutch 1 has the amount of its projection restricted by means B, so that even if the piston 17 is projected by manipulating the clutch pedal 20 like a pump, the piston 17 can be restrained from slipping off from the cylinder chamber

A, while the clutch disengaging members 5 are also prevented from being pushed by an excessive pressure or from contacting the clutch disk 8.

FIGS. 19 to 21 show another embodiment of the invention, in which the hollow cylinder 18 has an oil seal 76 and a dust seal 77 fitted in its inner peripheral surface, with an oil pressure relief port 78 formed between the two seals 76 and 77. The relief port 78 remains closed when the clutch pedal 20 is depressed once since the right end of the piston 17 shown in FIG. 19 is not brought to the position of the oil seal 76. However, when the right end of the piston 17 is brought to the left side of the oil seal 76 by the pumping movement of the pedal, that is, when the piston 17 is almost brought to the limit of its projection, the port 78 communicates with the cylinder chamber A before the piston is positioned at the limit, permitting the pressure oil to escape from the cylinder chamber A to the outside via the relief port 78. This prevents the piston 17 from reaching the limit of projection.

The oil thus released may be introduced into the transmission case, whereas the amount of oil in the master cylinder 21 then decreases. Accordingly, the oil is returned to the oil tank 26 via a return pipe (or hose) 79.

A vent 80 for removing air is formed in an upper portion (lower portion in FIG. 19) of the hollow cylinder 18. The vent 80 serves to remove air from the cylinder chamber A and is held in communication with an air discharger 82 by a pipe (or hose) 81.

The air discharger 82, which may be mounted on any portion of the tractor body, is preferably attached to the clutch housing 9 in the vicinity of the clutch pedal 20 or to a side upper portion of the transmission case with use of a bracket 83. Since air must be removed from the hydraulic cylinder 19 by manipulating the air discharger 82 while depressing the clutch pedal 20, the discharger is preferably accessible by the hand of the operator.

According to the embodiment described, the hollow cylinder 18 is formed with the oil pressure relief port 78 which communicates with the cylinder chamber A before the piston 17 substantially reaches the limit position of its projection, so that even if the piston 17 is projected by the pumping action of the clutch pedal 20, the cylinder chamber A can be relieved of the oil pressure before the piston substantially reaches the projection limit position. This prevents the clutch disengaging members 5 from being subjected to an excessive pressure or being brought into contact with the clutch disk 8 to obviate damage to the clutch 1.

FIGS. 22 to 25 show another embodiment of the invention. Indicated at 84 is a sensor (wear detecting means) for detecting wear on the clutch facing 8a of the clutch disk 8. The sensor comprises a limit switch and is attached to the hollow cylinder 18 so as to be opposed to the projecting end 39a of the projection 39 of the release hub 15 at a distance therefrom. As shown in FIG. 24, the sensor 84 has a normally open contact 86 connected in series with an alarm lamp, alarm buzzer or like alarm means 85 mounted on a panel in front of the driver's seat.

FIG. 22 shows the above construction with the clutch 1 in the engaged state. At this time, each projection 39 of the release hub 15 is at a lengthwise intermediate portion of the cutout groove 38. When pressure oil is supplied to the cylinder chamber A by depressing the clutch pedal 20 in this state, the release hub 15 moves forward, causing the release bearing 16 to push each clutch disengaging member 5 to thereby move the member 5 about a pivot 87 clockwise in FIG. 22, whereby the pressure plate 6 is moved rearward. This produces a clearance between the outer peripheral portion of the clutch disk 8 and each of the flywheel 2 and the pressure plate 6 to interrupt the transmission of power from the engine to the propeller shaft 3.

When released from the foot, the clutch pedal 20 is returned by an unillustrated spring, causing the force of the pressure springs 7 to exert a pressure on the pressure plate 6, which in turn presses the outer peripheral portion of the clutch disk 8 into contact with the flywheel 2 for the transmission of power from the engine to the propeller shaft 3. At the same time, each clutch disengaging member 5 is moved about the pivot 87 counterclockwise in FIG. 1 for a return movement. The release hub 15 is rearwardly moved and pushed back to the original position by the clutch disengaging member 5. Thus, the pressure springs 7 serve also as springs for returning the release hub 15. Accordingly, the clutch disengaging member 5 is in contact with the release bearing 16 at all times. As the clutch facings 8a wear, the pressure plate 6 shifts forward, moving the clutch disengaging member 5 counterclockwise in FIG. 22 to gradually shift the release hub 15 rearward. When the clutch facings 8a reach a limit of wear (limit to use) or before they reach the limit, the projecting end 39a of the projection 39 of the release hub 15 comes into contact with a plunger 88 of the sensor 84 to close the normally open contact 86 of the sensor 84 and actuate the alarm means 85. The operator therefore recognizes that the clutch disk 8 is to be replaced.

FIG. 25 shows another embodiment, wherein a pressure sensor 89 is disposed in an oil channel 90 communicating with the cylinder chamber A, and a safety switch 91 is adapted to come into contact with the clutch pedal 28 when the pedal 28 is depressed, rendering the engine ready to start. The present

embodiment is so adapted as to actuate alarm means when the clutch pedal 20 is brought into contact with the safety switch 91, with the pressure sensor 89 detecting no pressure.

More specifically, FIG. 25 shows the clutch in its engaged state. At this time, the oil channel 90 is in communication with the cylinder chamber A. As the clutch facings become worn, the opening of the oil channel 90 is closed with the piston 17 of the release hub 15. However, before the wear on the clutch facings reaches a limit, the oil channel 90 is brought into communication with the cylinder chamber A when the release hub 15 is moved forward by depressing the clutch pedal 20. When the wear of the clutch facings reaches the limit, the rear end of the piston 17 of the release hub 15 is positioned in the rear of the oil channel 90 to close the opening of the channel 90 even if the hub 15 is moved forward by the depression of the clutch pedal 20. At this time, the clutch pedal 20 comes into contact with the safety switch 91, and the pressure sensor 89 detects no pressure, so that the alarm means goes on. The pressure sensor 89 and the safety switch 91 or the like provide wear detecting means.

According to the embodiment described, the wear on the clutch disk is detected by the wear detecting means, whereupon the alarm means gives a notice. This serves to preclude damage to the clutch, etc., properly indicates when to replace the clutch disk, ensures convenience in maintenance and further assures an improved life without necessitating early replacement of the clutch disc.

The present invention is not limited to the foregoing embodiments but can be modified variously. For example, the clutch 1 may be a dual clutch for effecting and interrupting power transmission to the propeller shafts 3, and 13 for the running system and the PTO system, or the clutch disengaging member 5 may be a diaphragm spring.

INDUSTRIAL APPLICATION

The present invention is usable as a clutch operating device for tractors and like vehicles.

	1 clutch	24 thread
	2 flywheel	25 bolt
5	3 propeller shaft	26 oil tank
	4 clutch cover	27 low level sensor
10	5 clutch disengaging member	29 starter
	6 pressure plate	30 key switch
	7 pressure spring	31 power supply
15	8 clutch disk	32 engine stopping means
	9 clutch housing	34 engine stopping solenoid
20	10 support wall	36 alarm means
	11 tubular portion	38 cutout groove
	12 bearing	39 projection
25	13 PTO propeller shaft	40 retaining means
	14 hydraulic clutch	41 coiled compression spring (elastic member)
30	15 release hub	42 air vent
	16 release bearing	43 master cylinder
	17 annular piston	44 master cylinder
35	18 hollow cylinder	45 tank
	19 hydraulic cylinder	46 hole
40	20 clutch pedal	47 rubber tube
	21 master cylinder	48 pipe insertion passage
	22 hose	49 slit
45	23 pressure oil supply means	50 hole

50

55

	51 groove	73 rod
	52 roll pin	74 nut
5	53 seal	76 oil seal
	54 seal	77 dust seal
10	55 pedal sensor	78 oil pressure relief port
	56 pressure sensor	79 pipe
	57 control box	80 air removing vent
15	58 alarm	81 pipe
	59 malfunction handling means	82 air discharger
20	60 clutch wear limit detector	83 bracket
	61 valve casing	84 wear detecting means
	62 oil channel	85 alarm means
25	63 valve disk	86 normally open contact
	64 spring	87 pivot
30	65 valve seat	88 plunger
	66 pressure sensor	89 pressure sensor
	67 projection	90 oil channel
35	68 pushing member	91 safety switch
	69 alarm	A cylinder chamber
40	70 retaining ring	B projection restricting means
	71 projection	
45	72 projection	

Claims

- 50 1. A clutch operating device for use in vehicles for pushing the clutch disengaging members of a dry disk clutch which is disposed between a flywheel mounted on the output shaft of an engine and a propeller shaft rotatably supported by a support wall of a transmission case, the device being characterized in that the device comprises:
- 55 an annular cylinder chamber provided on the support wall concentrically with the propeller shaft,
an annular piston axially slidably fitted in the cylinder chamber,
a release bearing mounted on the forward end of the piston and engageable with the clutch disengaging members by contact therewith, and
means for supplying a pressure oil to the cylinder chamber by depressing a clutch pedal to push out

the piston toward the clutch disengaging members.

2. A vehicle clutch operating device as defined in claim 1 and characterized in that the cylinder chamber comprises an annular space formed between a tubular portion surrounding the propeller shaft and projecting from the support wall toward the clutch and a hollow cylinder provided around the tubular portion.
3. A vehicle clutch operating device as defined in claim 2 and characterized in that the hollow cylinder is in screw-thread engagement with the tubular portion.
4. A vehicle clutch operating device as defined in claim 1 and characterized in that the cylinder chamber comprises an annular space formed in the support wall.
5. A vehicle clutch operating device as defined in any one of claims 2 to 4 and characterized in that a bearing is interposed between the inner surface of the tubular portion and the propeller shaft.
6. A vehicle clutch operating device as defined in claim 1 and characterized in that an elastic member is provided for biasing the piston toward the clutch disengaging members.
7. A vehicle clutch operating device as defined in claim 1 and characterized in that retaining means is provided for preventing the piston from rotating relative to the tubular portion.
8. A vehicle clutch operating device as defined in claim 1 and characterized in that restricting means is provided for restricting the amount of movement of the piston toward the clutch.
9. A vehicle clutch operating device as defined in claim 8 and characterized in that the restricting means comprises a retaining ring provided on the propeller shaft.
10. A vehicle clutch operating device as defined in claim 8 and characterized in that the restricting means comprises bolts disposed between the piston and the hollow cylinder.
11. A vehicle clutch operating device as defined in claim 2 and characterized in that the hollow cylinder is formed with an oil pressure relief port communicating with the cylinder chamber immediately before the piston reaches a projection limit.
12. A vehicle clutch operating device as defined in claim 1 and characterized in that the oil pressure supplying means is provided with a pressure sensor for detecting an abnormal oil pressure when the clutch pedal is depressed, and malfunction handling means operable upon the pressure sensor detecting the abnormal oil pressure.
13. A vehicle clutch operating device as defined in claim 1 and characterized in that the oil pressure supplying means is provided with an oil tank, a low level sensor for detecting a lowered oil level in the oil tank, and engine stopping means for rendering the engine inoperative upon the low level sensor detecting the lowered oil level.
14. A vehicle clutch operating device as defined in claim 1 and characterized in that the oil pressure supplying means is provided with an oil tank, a low level sensor for detecting a lowered oil level in the oil tank, and alarm means operable upon the low level sensor detecting the lowered oil level.
15. A vehicle clutch operating device as defined in claim 1 and characterized in that means is provided for detecting the home position of the piston.

FIG. 1

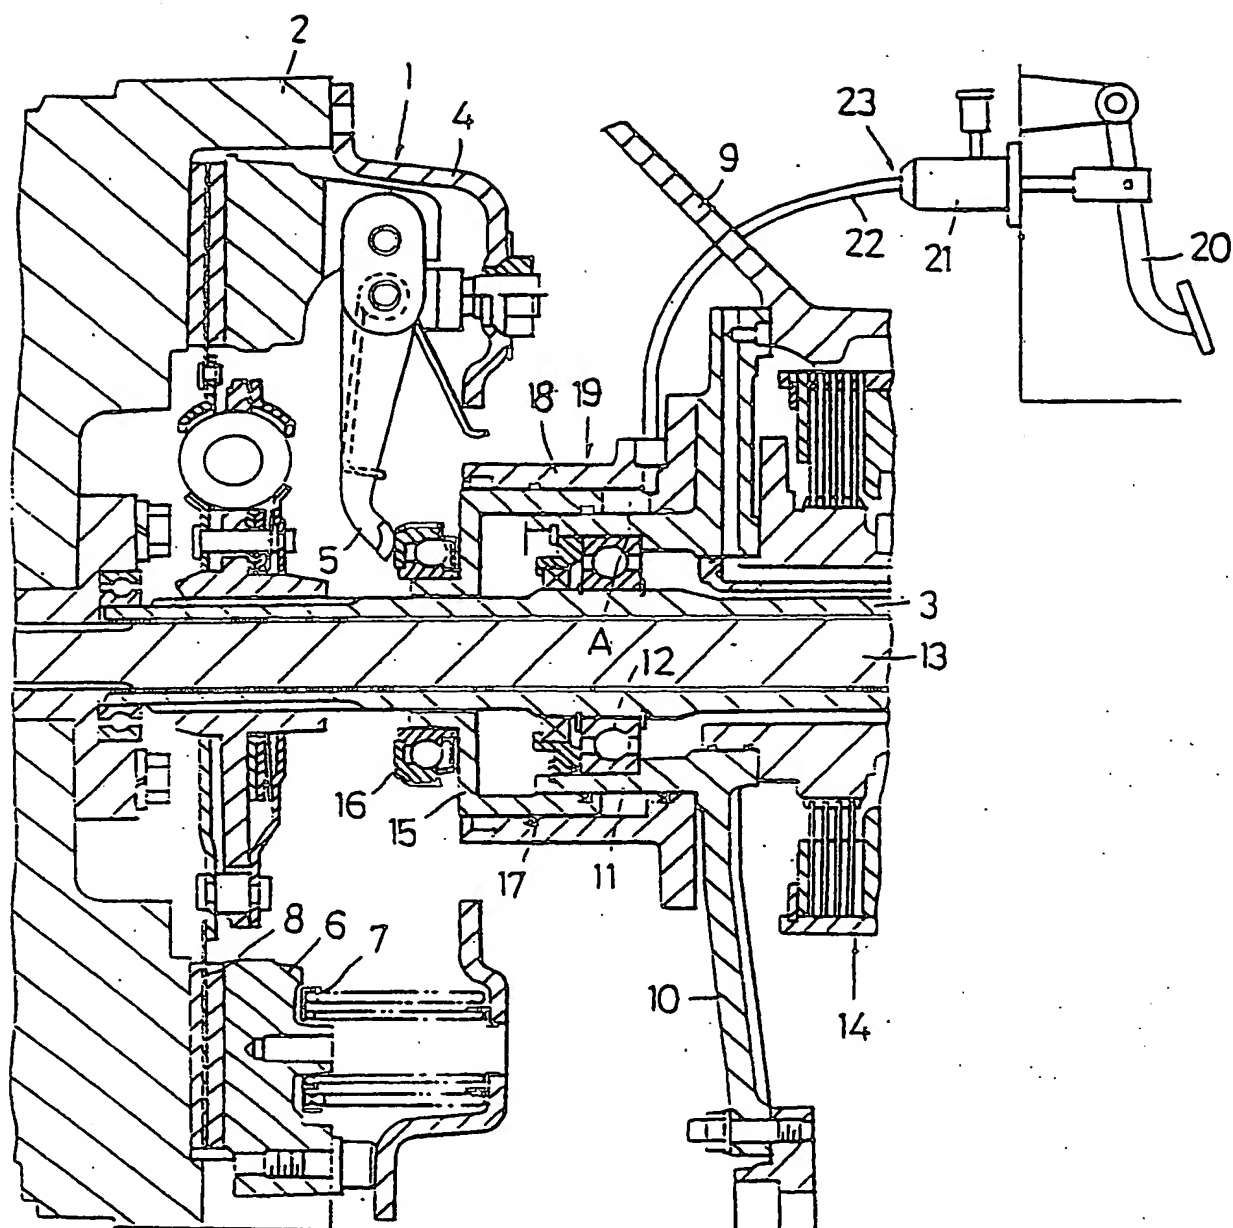


FIG. 2

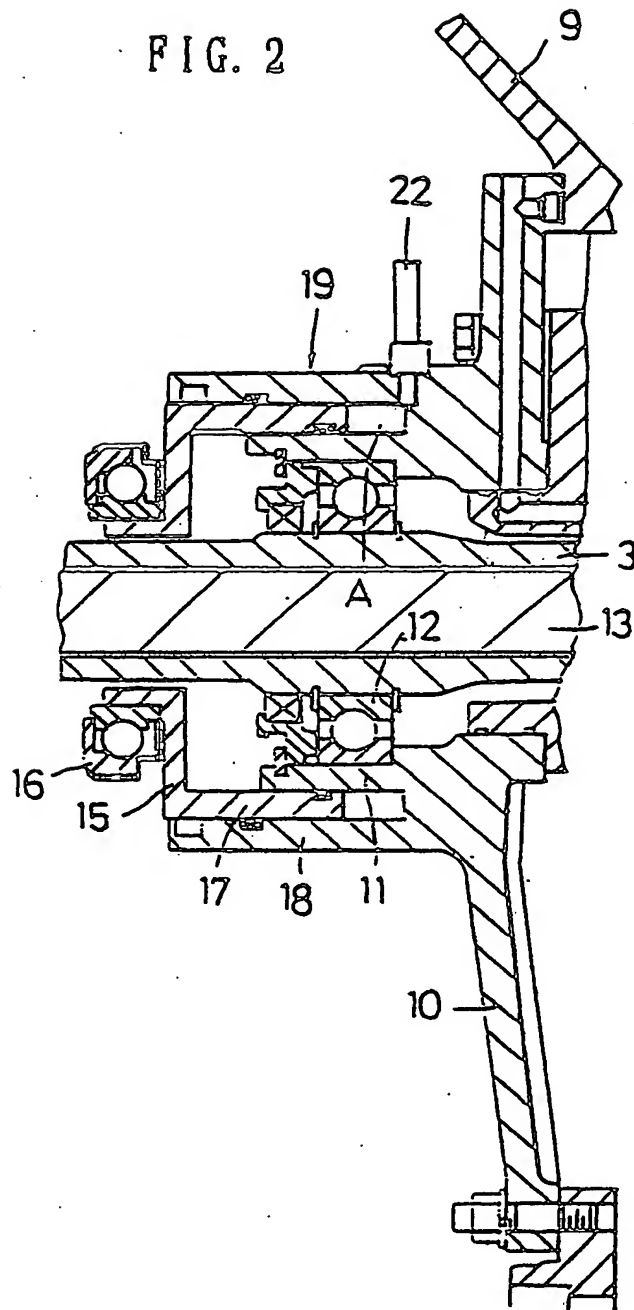


FIG. 3

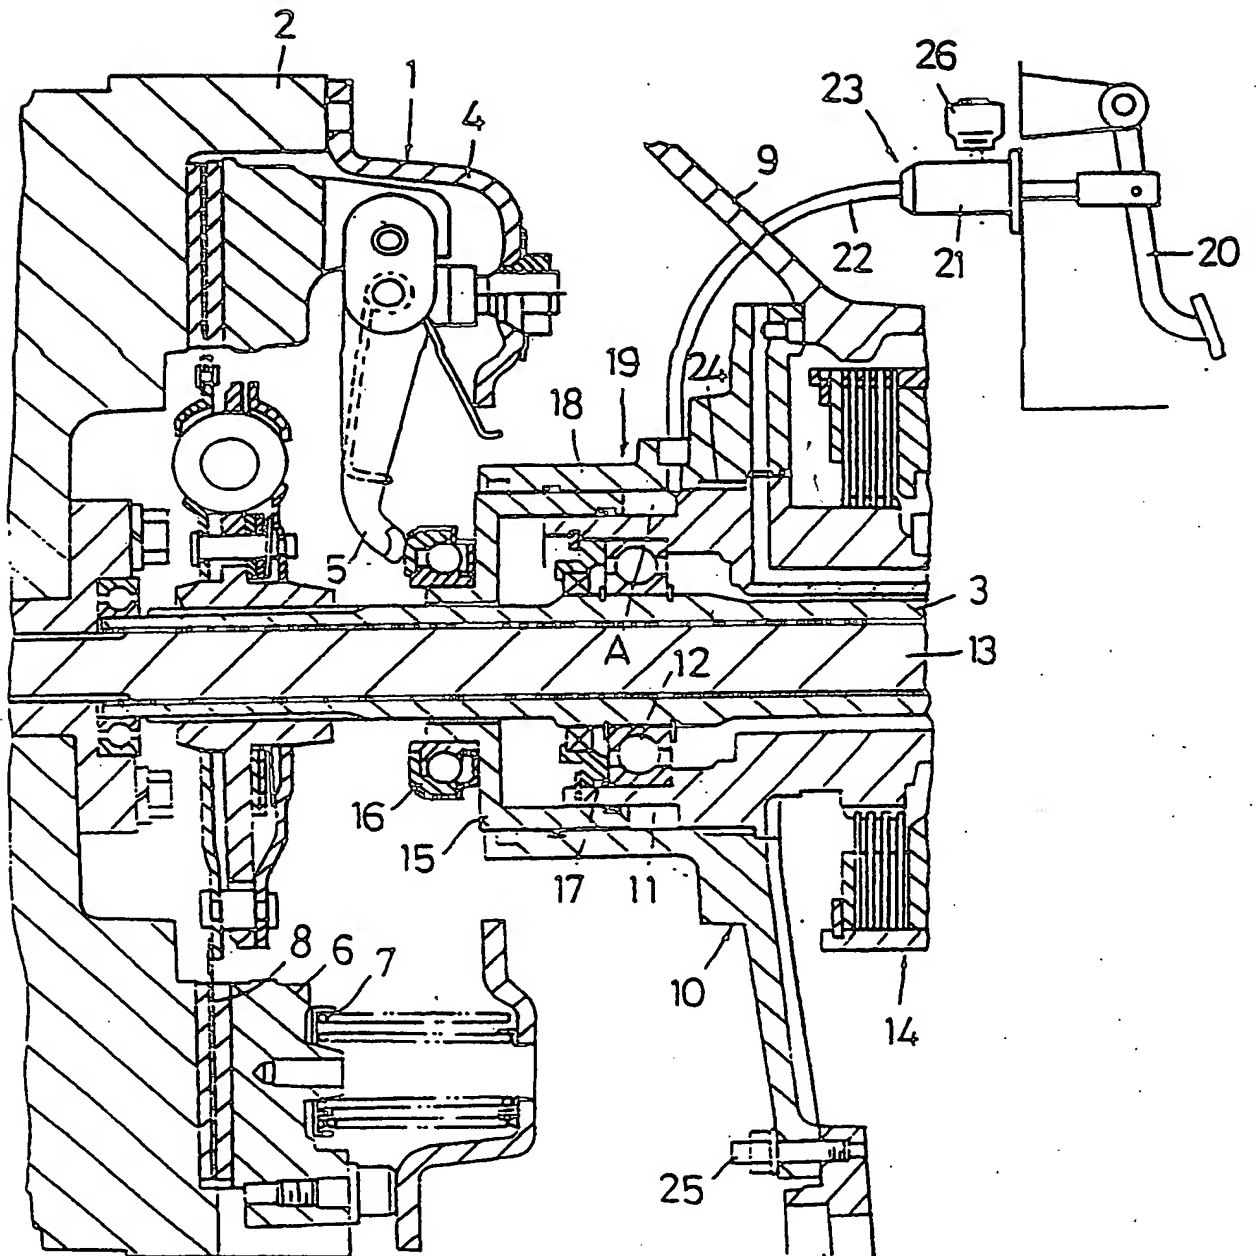


FIG. 5

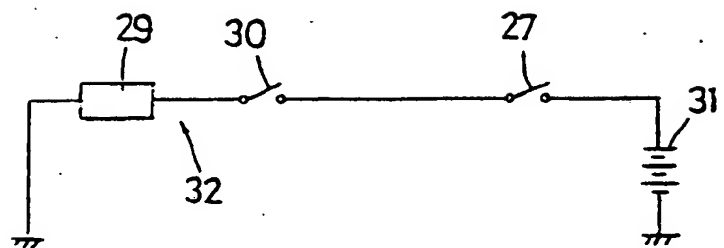


FIG. 6

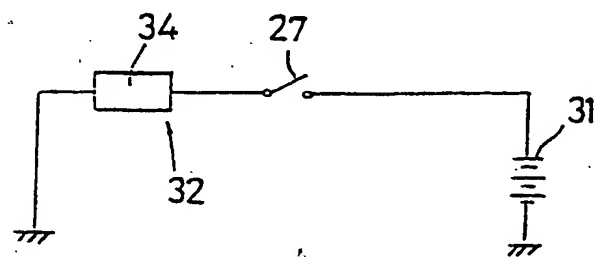


FIG. 4

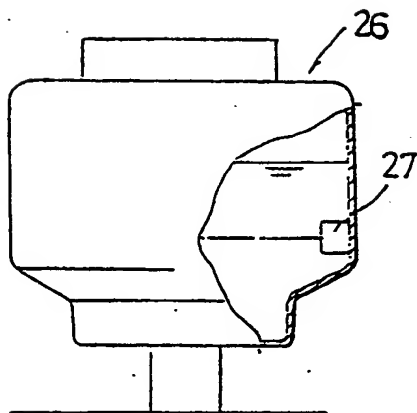


FIG. 7

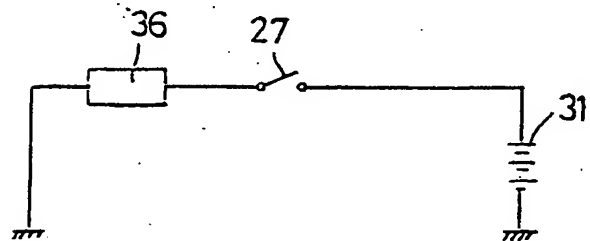


FIG. 8

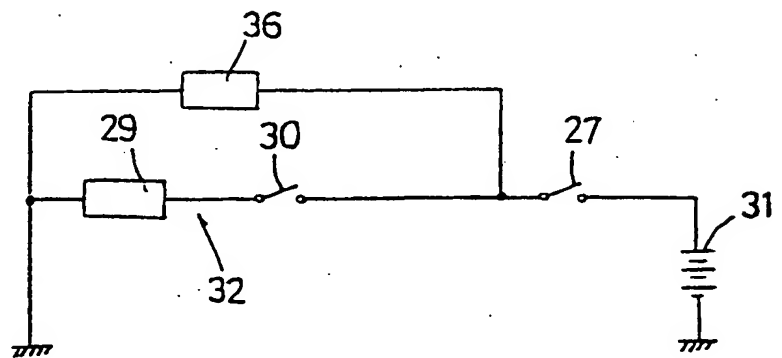


FIG. 9

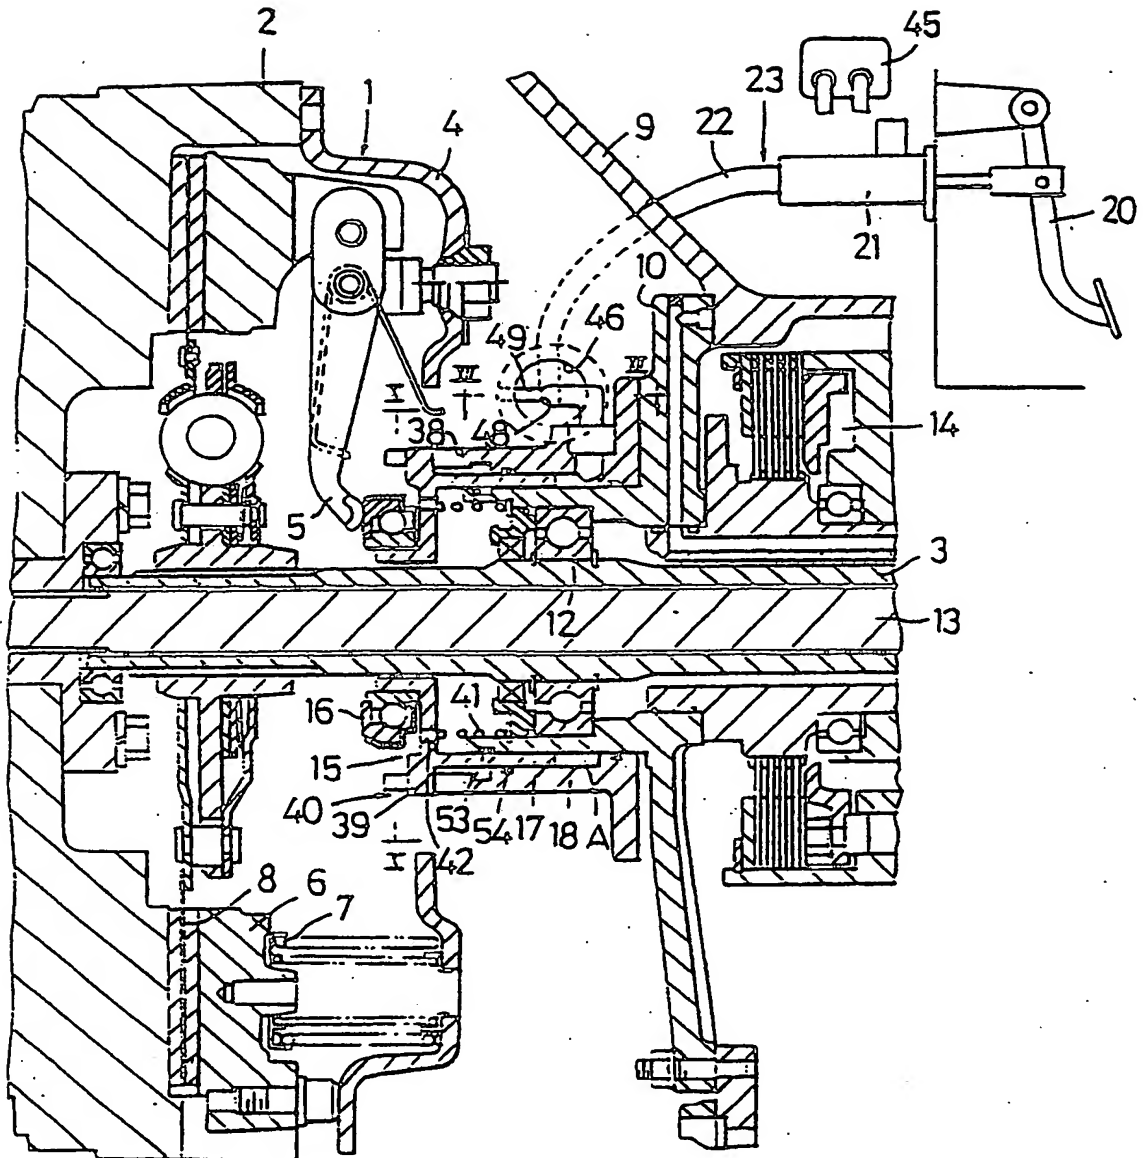


FIG. 10

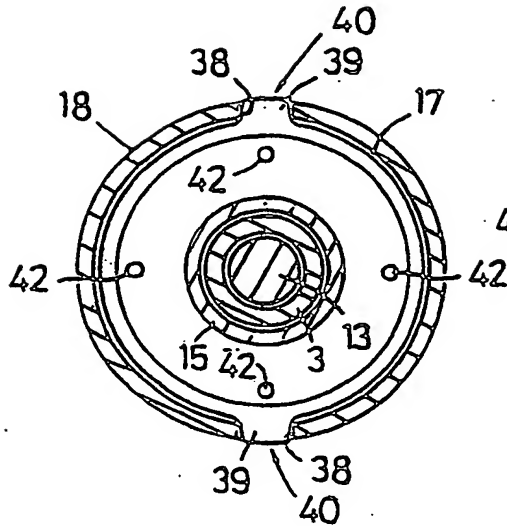


FIG. 11

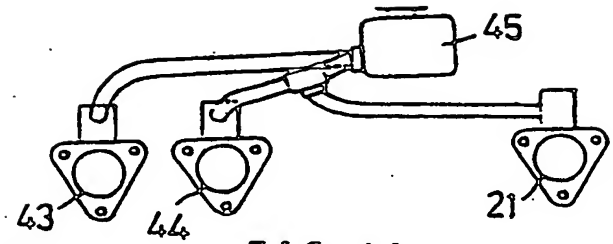


FIG. 12




FIG. 13

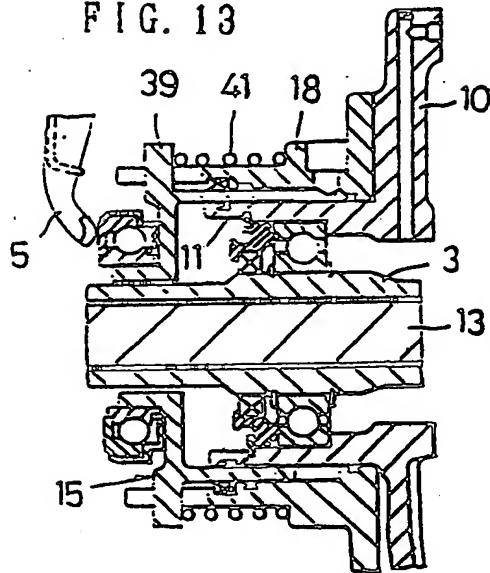


FIG. 14

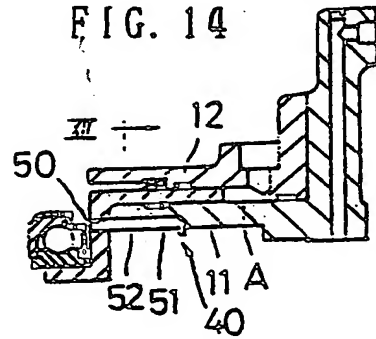


FIG. 15

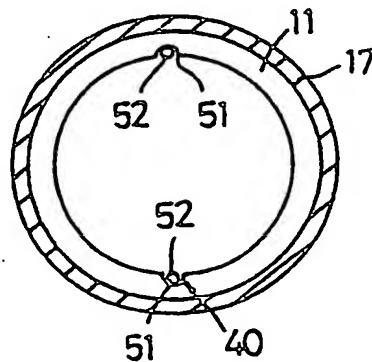


FIG. 16

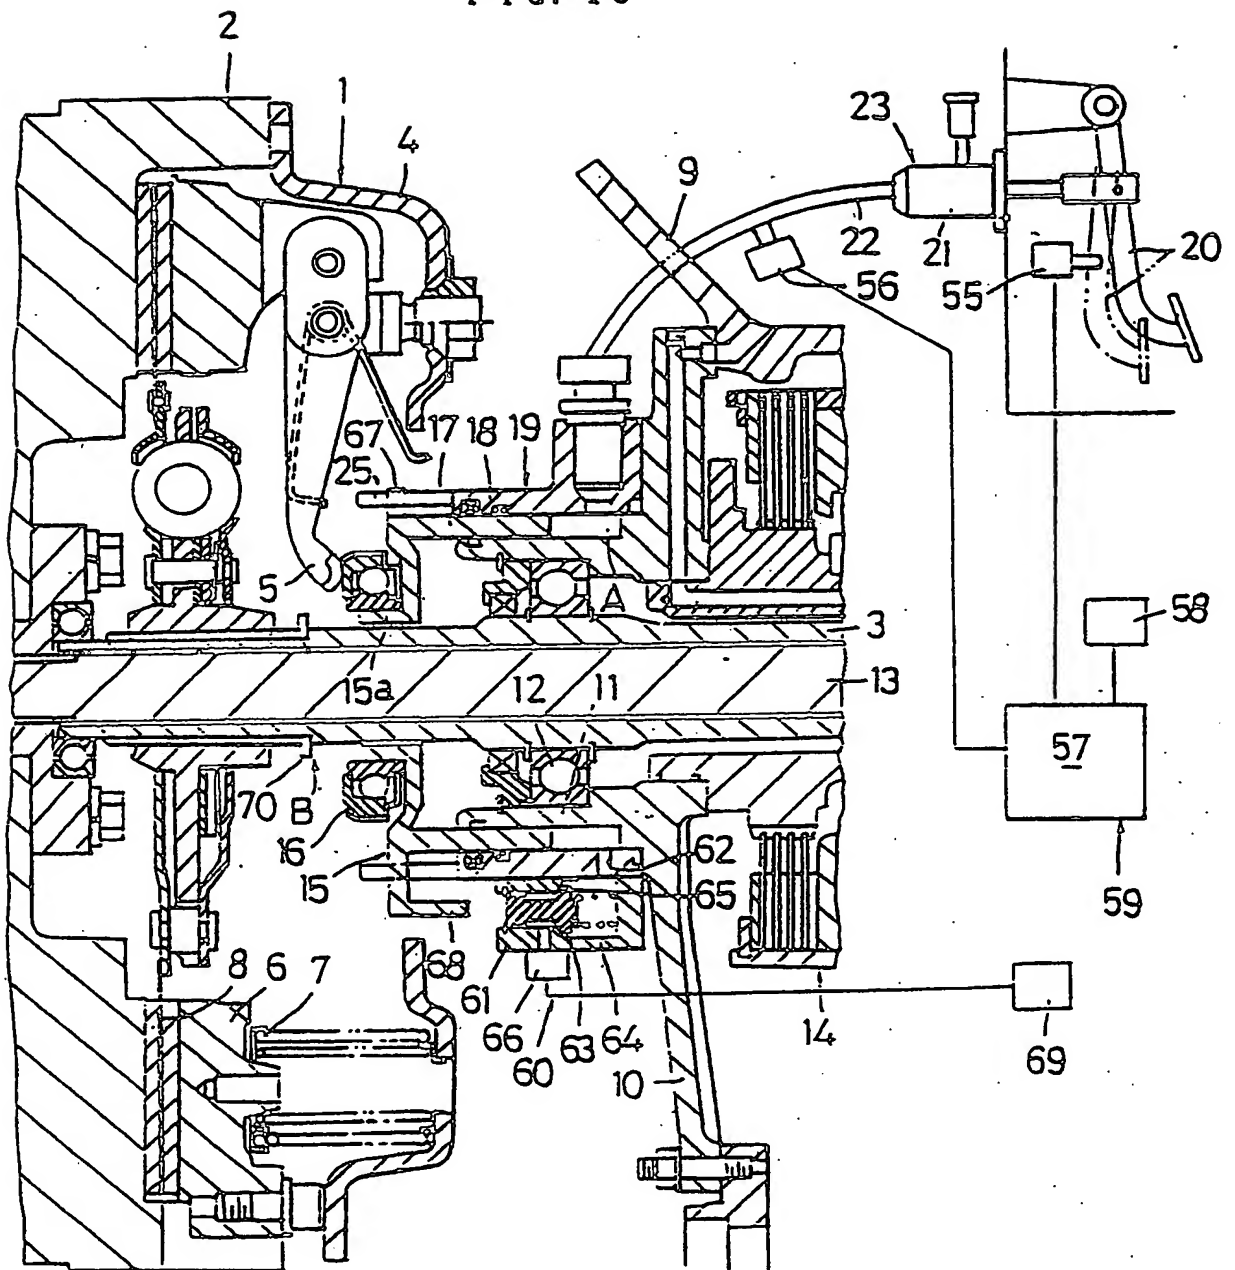


FIG. 18

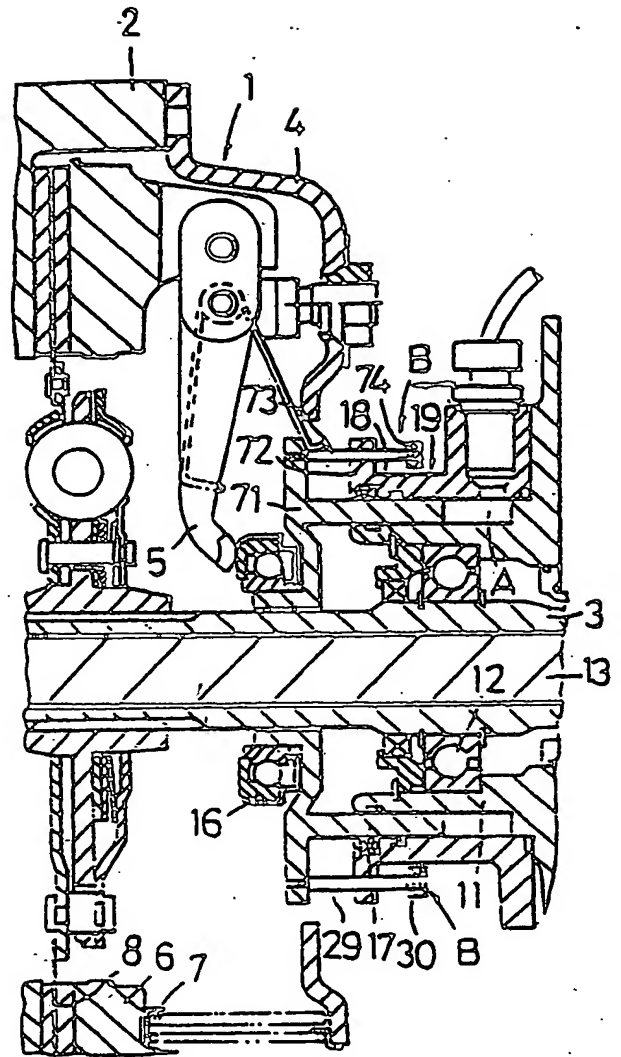


FIG. 17

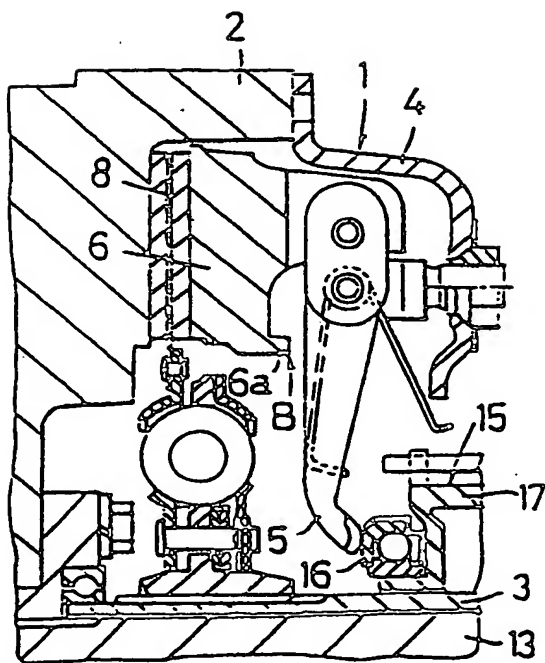


FIG. 19

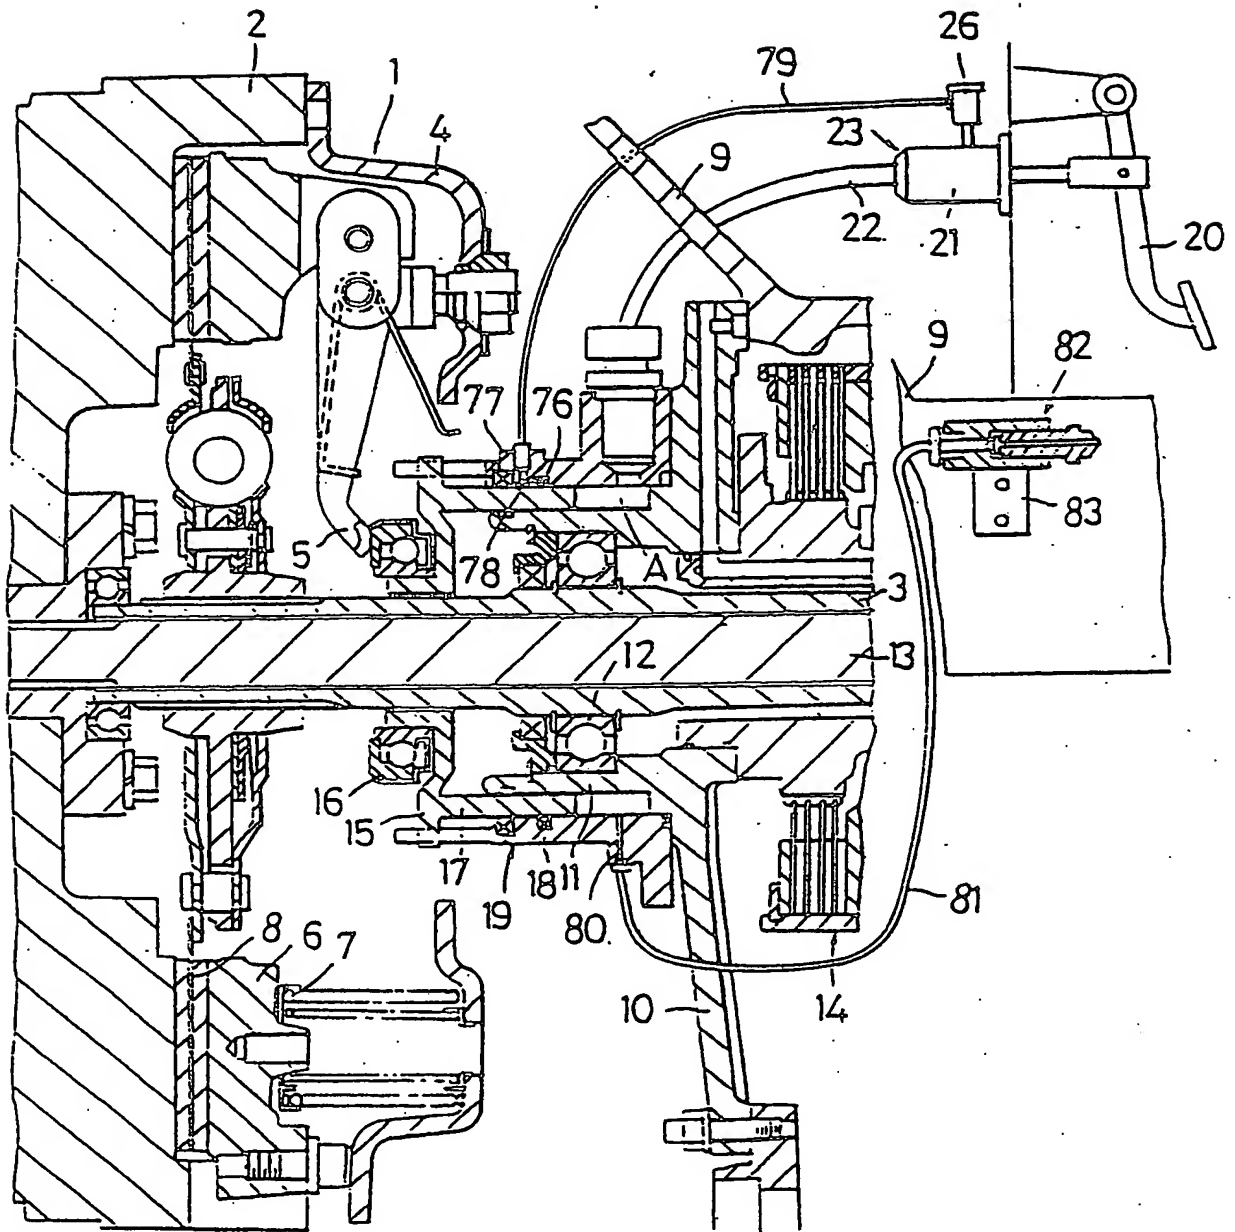


FIG. 20

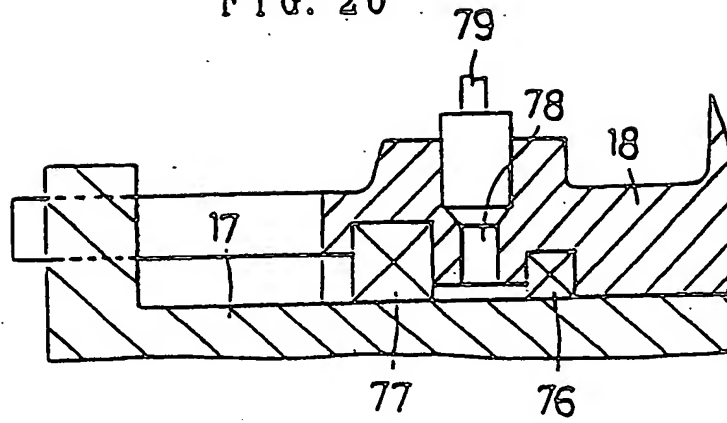


FIG. 21

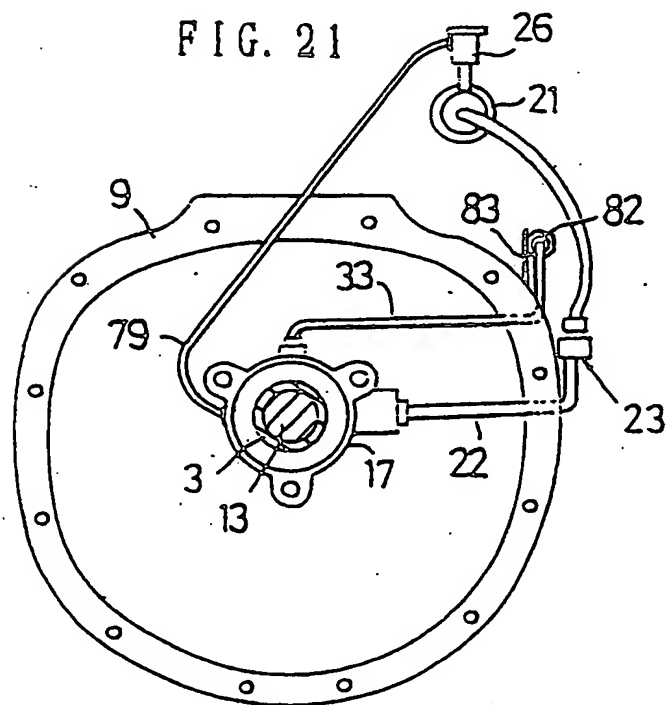


FIG. 22

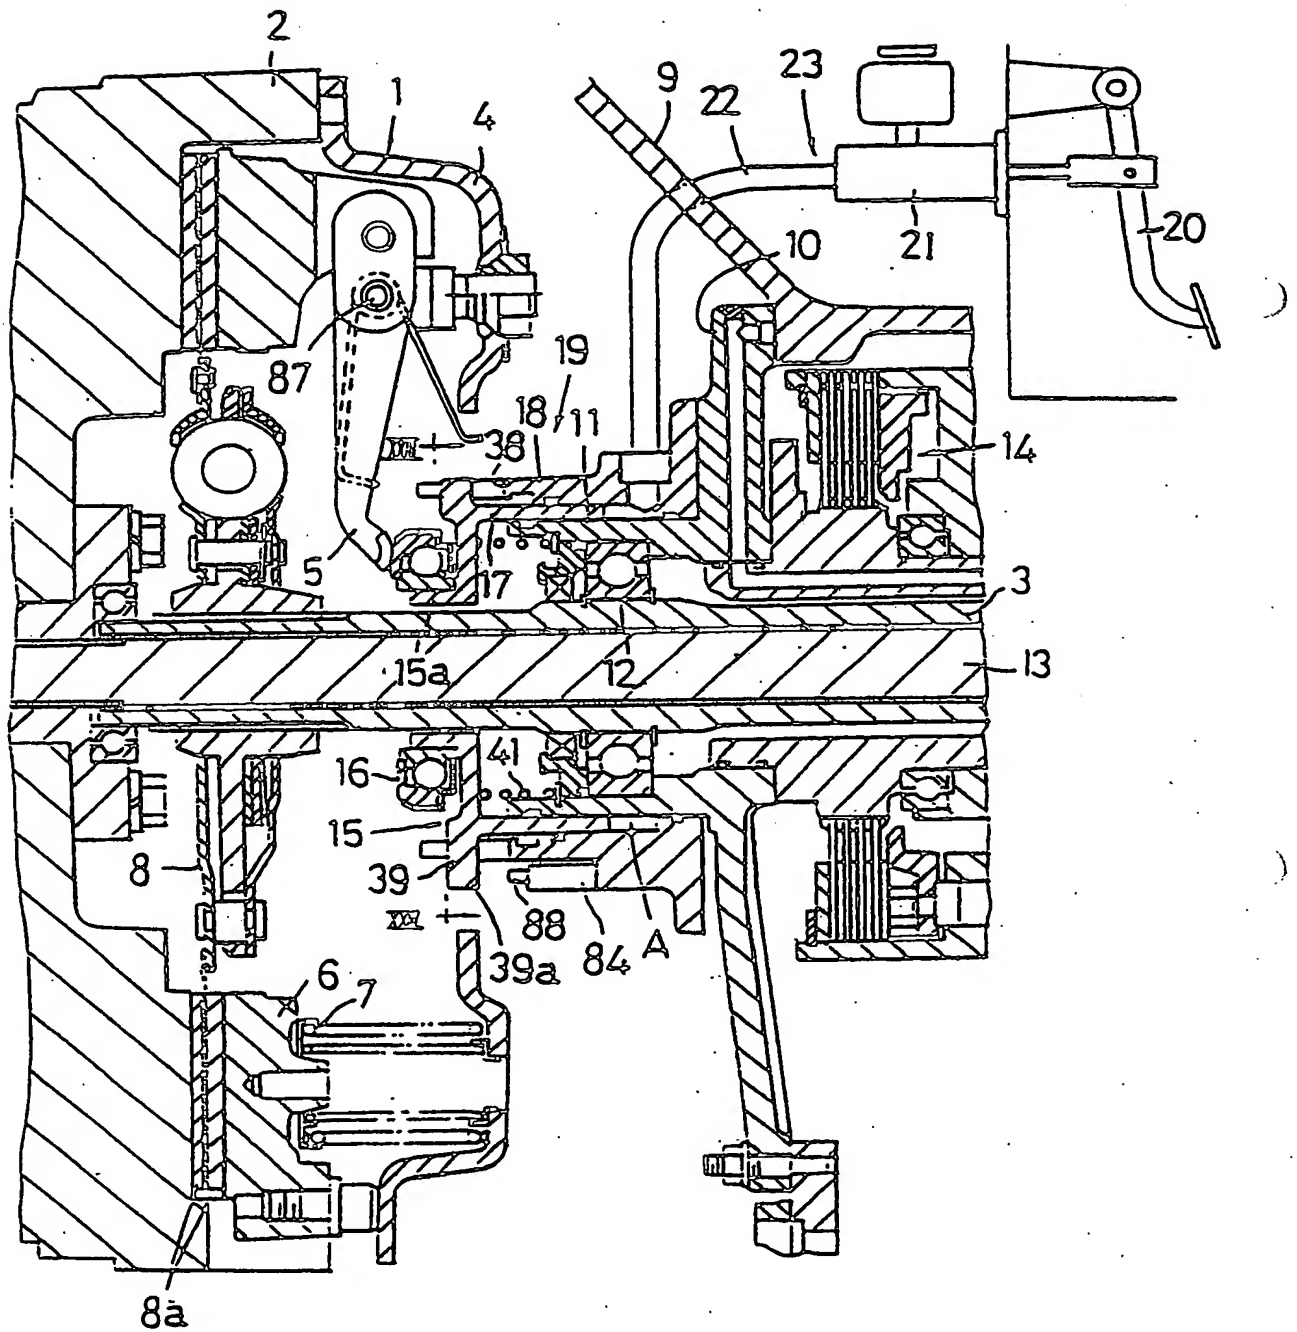


FIG. 23

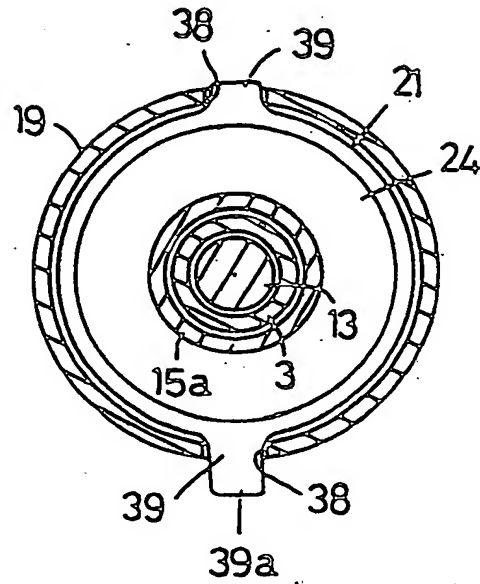


FIG. 25


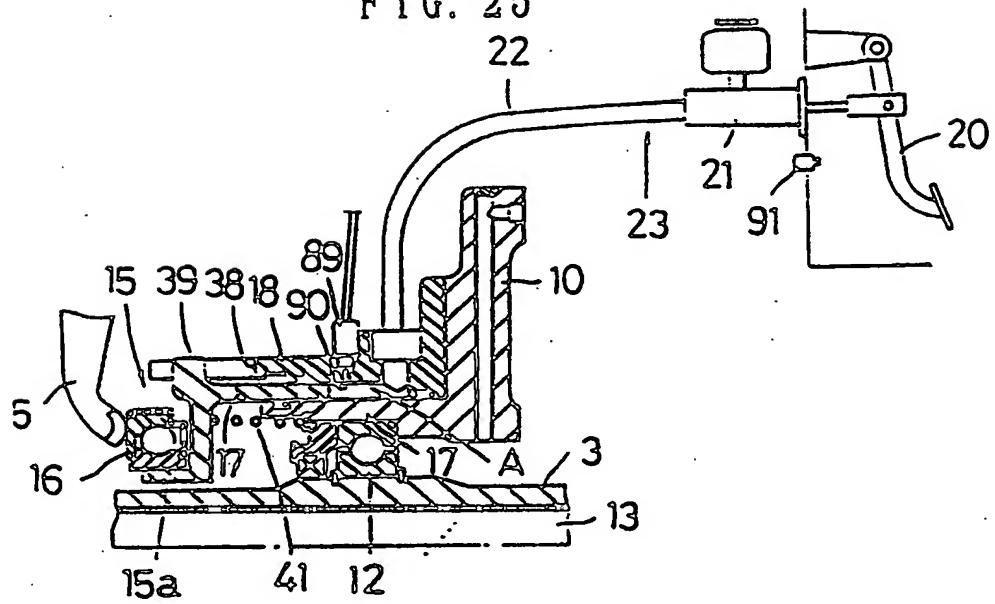


FIG. 24

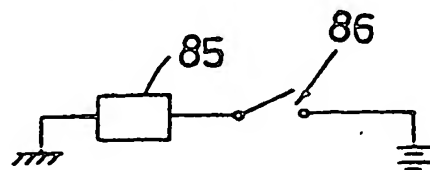

INTERNATIONAL SEARCH REPORT

International Application No. **PCT/JP90/00862**

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) *		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int. Cl ⁵	F16D25/08, F16D25/12, F02N11/10, F02N15/10	
II. FIELDS SEARCHED		
Minimum Documentation Searched :		
Classification System:	Classification Symbols	
IPC	F16D25/08, F16D25/12, F02N11/10, F02N15/10	
Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched :		
Jitsuyo Shinan Koho	1926 - 1990	
Kokai Jitsuyo Shinan Koho	1971 - 1990	
III. DOCUMENTS CONSIDERED TO BE RELEVANT *		
Category *	Citation of Document, ** with indication, where appropriate, of the relevant passages **	Relevant to Claim No. **
X	JP, A, 59-1820 (Federal-Mogul Corp.), 7 January 1984 (07. 01. 84) & US, A, 4,601,374 & US, A, 4,620,625	1, 5-8
Y	JP, A, 59-1820 (Federal-Mogul Corp.), 7 January 1984 (07. 01. 84) & US, A, 4,601,374 & US, A, 4,620,625	2-4, 9-15
Y	JP, Y2, 57-30506 (Aisin Seiki Co., Ltd. and another), 5 July 1982 (05. 07. 82), (Family: none)	2, 3, 7
X	JP, U, 60-175916 (Koyo Seiko K.K.), 21 November 1985 (21. 11. 85), (Family: none)	7
Y	JP, U, 61-154329 (Koyo Seiko K.K.), 25 September 1986 (25. 09. 86), Stop ring 8 (Family: none)	9
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categorization of cited documents: **</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"G" document member of the same patent family</p> </div> </div>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
September 25, 1990 (25. 09. 90)	October 8, 1990 (08. 10. 90)	
International Searching Authority	Signature of Authorized Officer	
Japanese Patent Office		

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

Y	JP, Y2, 48-44501 (Hisamitsu Kadono), 21 December 1973 (21. 12. 73), Lines 19 to 24, column 2, page 1 (Family: none)	10
Y	JP, U, 51-58285 (Mitsubishi Heavy Industries, Ltd.), 7 May 1976 (07. 05. 76), Aperatures 5a-5d and discharge channels 6a-6d (Family: none)	11
Y	JP, U, 63-126647 (Hino Motors, Ltd.), 18 August 1988 (18. 08. 88), Hydraulic sensor 45 (Family: none)	12

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers , because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claim numbers , because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claim numbers , because they are dependent claims and are not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.
2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:
3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:
4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remarks on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

Y	JP, A, 1-169127 (Hino Motors, Ltd.), 4 July 1989 (04. 07. 89), Fig. 3 (Family: none)	12
Y	JP, U, 55-132311 (Kubota, Ltd.), 19 September 1980 (19. 09. 80), (Family: none)	13
Y	JP, Y1, 41-16822 (Takeshi Urada), 4 August 1966 (04. 08. 66), Line 33, right column, page 1 to line 2, left column, page 2 (Family: none)	14

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers . . . because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claim numbers . . . because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claim numbers . . . because they are dependent claims and are not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.
2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:

3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:

4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remark on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

Y	JP, U, 53-43155 (Toyota Motors Corp.), 13 April 1978 (13. 04. 78), Indication machinery 21 (Family: none)	15
Y	JP, Y2, 58-17939 (Toyota Motors Corp.), 12 April 1983 (12. 04. 83), Electrode 14 (Family: none)	15

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claim numbers because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claim numbers because they are dependent claims and are not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.
2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:
3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:
4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remarks on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.